

LORCH smart welding



The new reference in industrial welding.

www.lorch.eu



Are you ready for the future?

The welding system you can rely on.


Soaring costs, increasing competitive pressure, ever more complex customer requirements – we understand the challenges you are facing in order to combine investment security and solution competence.


Our solution is using the best technology available in a smart manner. Further digital development that keeps coming, combined with greatest efficiency and performance, makes a decisive difference in Industrial welding production.

We have put all we have into delivering on this value proposition with the iQS. A completely new inverter ensures control stability and the best arc available from within the Lorch portfolio. Our highest priority is giving our customers greatest availability in their production with the iQS. Every part has been tested for tough industrial use and adapted accordingly. This, combined with the intuitive operation, makes the technology accessible to every welder.

Is this just what you are looking for? Then keep reading and convince yourself of a secure future for welding.

What makes your future safe?

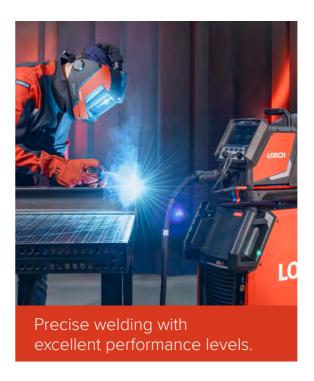

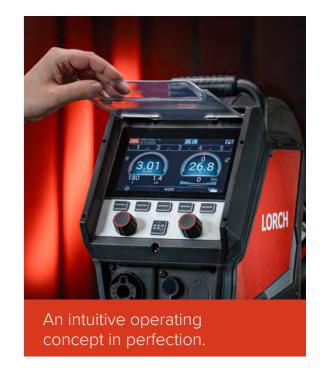





NOW: Discover the improvements that are possible for your everyday work!

Challenges in everyday life.

Welding production



Welding data is not transparent
4-eye principle for quality deviations
Complicated and expensive updates or upgrades

Operation of the welding unit

2

Hidden settings Complex and scattered operating menus Touch displays that are not operable whist wearing gloves

Water cooling



Possible leakage due to poor clamping with jubilee clips Time consuming coolant replacement Complicated fuse change

Welding inverters



Circuit board damage caused by dust ingress during normal use Complicated and expensive dust filters Difficult access to control boards

Get started in practical use with the iQS!







Intuitive control panel. 3-2-1 welding.

The Smart-Cockpit with 7" display. Can be used with push-button or touch operation. Even when wearing welding gloves.

Over-the-air. Remote service.

Simply secure updates conveniently via Wi-Fi and stay up to date at all times.

Wi-Fi on board. By default.

Over-the-air upgrades or features via subscription model. Lorch Connect ex works.

9 OUT OF 10 MAINTENANCE ENGINEERS CONFIRM:

"The iQS proves that you have listened to us."







Extremely simple service.

The entire power module can be easily exchanged without fuss.

Access to fuses and possibility to drain coolant without removal of cooling unit.

Exceptional dust protection.

Encapsulated air duct and separate dust-free electronics area.

Leak-safety.

No jubilee clips. Only industry standard QuickConnect water hoses.



Absolute High-end Welding Performance.



New Smart Process Control Engine (SPC Engine).

Faster to new processes.


Time equals money – it certainly does in production. A new SPC engine allows us to develop welding processes and suitable synergic lines and to transfer them to your iQS even more quickly. We are also happy to incorporate our customers' ideas in this. This makes it easy to create new innovations – in record times. In any case, you will always get cutting-edge equipment – no matter the market developments.

Clean weld seams, barely any spatter. Brought to you by the reverse voltage source (RCS).

A newly developed RCS module (Rapid Current Shutdown) has enabled us to further improve our short arc processes. The result is a particularly clean process with less spatter and even higher weld seam quality. This saves your welders the need for elaborate rework and thus plenty of time and money.

Another advantage for the user: The weld pool can be better controlled and manipulated.
This improves welding greatly, in particular thin sheets <3mm.

Our high-end welding unit series guarantees optimum results through advanced development and experience – for greater efficiency, cost savings and satisfaction.

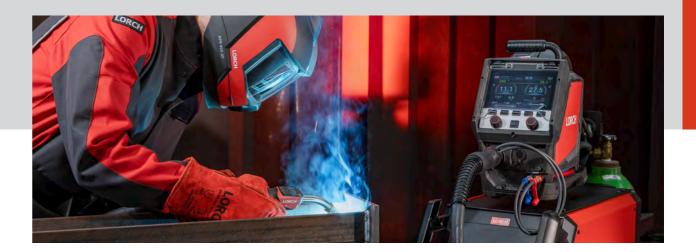

A calm process.

Thanks to the new inverter.

A new, robust inverter was developed for the iQS. It makes processes run even more stably and smoothly. Users can steplessly adjust parameters and select the perfect working point for them. This improves the weld seam quality and minimises rework.

Its high performance also makes the iQS ideally suited for robot connections – offering an opportunity for companies to further optimise operator comfort, cost efficiency, and welding results. Experience welding 4.0.

Optimal welding behaviour saves time. Three times over.

From the moment of its market launch, the iQS has come with a vast range of processes and synergic lines, which Lorch is also continuously expanding. For you, this means three times more efficiency in your work processes:

Faster to get started: The iQS offers the right synergic lines for virtually any application – rendering major corrections unnecessary.

Faster in the process: Our speed synergic lines enable faster welding for the user.

Faster to finish: Our processes are particularly low-spatter, saving elaborate rework.

The Masters of Speed.

Always the right answer.



SpeedPulse XT

Extra fast.
Extra low spatter.
Particularly forgiving for the welder.



SpeedArc XT

Stands out with a particularly focused arc and a significantly higher power density and increased arc pressure.



TwinPuls XT

The most beautiful MIG-MAG weld seams at maximum speed.

Speed, quality, penetration, and weld appearance pose high demands to the welding process to produce a perfect weld seam in a vast variety of welding positions.



SpeedTwin

Greater focus on what is truly important: Perfect weld appearance, quick and customisable.



SpeedRoot

For visibly better quality in MIG-MAG root welding.

The innovative welding processes from Lorch.

Our engineers have developed outstanding MIG-MAG-process innovations for you based on experience from industry practice as well as the wishes of many users

This has led to Lorch Speed processes that significantly increase your welding speed, noticeably simplify the process, and allow unparalleled productivity.



SpeedUp

A high in vertical seam welding.



SpeedCold

Icy efficiency in thin-sheet welding.

Overview of the advantages:

- Higher speed
- Better weld seam quality
- Increased penetration
- More beautiful appearance of the weld seams
- Reduced welding fumes
- Less noise pollution
- More reliable results due to better process control

The Lorch Speed processe in detail: www.lorch.eu.



Digitise, analyse, and reliably optimise your **welding processes.**

Use the enormous potential in the data recorded by you.

Lorch Connect will let you easily and comfortably recognise productivity of all connected systems.

Keep the costs of all orders fully in view and track the quality of all recorded weld seams at any time. Lorch Connect is ideal for small and medium-sized enterprises: The smart **Lorch Connect Cloud** will let you use all advantages without any great investments or time-consuming adjustments of your IT infrastructure.





Connect.

The iQS lets you connect directly to the Lorch Connect portal by Wi-Fi. Get going.



Weld.

Welding data and other production-relevant details are directly recorded by the iQS and transferred to the Lorch Connect Portal in the cloud in real time.



See clearly.

The indicative dashboards give you a perfect overview of everything in the Lorch Connect Portal – anywhere, at any time in the app and web browser.

Lorch Connect: Your perfect gateway into the digital era. Get going.



Because it is so very **simple**.

The iQS makes it easier than ever to get a welding solution that is fully integrated into the cloud. The cloud lets you comfortably access the portal from any internet-enabled device anywhere in the world.





Lorch Connect is entirely cloud-based and does not require additional investment in new IT systems. Start with the free functions of iQS and take out a subscription with more advanced functions as and when required.

Because it is safe.



Data processing within Lorch Connect takes place based on all required safety standards. Lorch welding technology and the data centres used within the EU meet the highest European data protection directives. The offline memory in the iQS keeps your data connection stable at all times. Interruption of the connection can be bridged for up to 30 days.

Because it is **flexible**.



Lorch Connect always stays up to date with the iQS and is subject to constant further development. This keeps you flexible. Functions such as remote service and flexible upgrades can thus be used as soon as they become available.

Because it is smart.



Processes are monitored, documented, and visualised in real time. The Lorch Connect Portal gives you a perfect overview of all data from your connected systems in your personal account, enabling you to make processes comprehensible in detail and optimising your welding production in quality, productivity, and profitability.



The MF-09.

The multifunctional, powerful, and intuitively operable wire feeder.

The equipment and accessories for the iQS are just as diverse as your areas of application. This also includes a completely new MF-09 wire feeder.

That is the part that must fit perfectly with the intended use in everyday production. Long weld seams, large parts, and difficult welding positions require precisely the right feeder case configuration.

The MF-09 offers an all-round carefree package for your production. The long and short of it is that your welder must love the feeder case and be able to work with it. That is why we focus on user-friendliness in everyday use in combination with maximum robustness.

The result leaves nothing to be desired.

3 points for practice.

1

Modular design, also available as bulk pack version.

The MF-09 has a modular design. The spool housing can be disassembled to obtain the most compact wire feeder possible for a bulk pack.

2

MF-09. Water or gas version?

The feeder can be used both as a gas or water version. This is determined by whichever interconnection hose package is connected. Easy to attach and installed with a single click. This makes the conversion between water and gas particularly uncomplicated.

3

The right undercarriage for maximum range with the MF-09.

Suitable suspension kits are available for the MF-09. The wire feeder is supplied with slide rails ex works. However, a 65 mm roll or 125 mm heavy-duty trolley kit can also be fitted at need.







Simple and robust feeder case fixture.


A robust and stable mandrel helps in placing the feeder case intuitively on the system for transport. The bottom of the MF-09 is designed to make it particularly easy to find the right place for latching it. Truly Smart.

Robust 4x4 feed system with quick exchange system.

The easily accessible wire feeder of the iQS offers sophistication in every detail. The perfectly coordinated exchange system makes sure that nothing is standing in the way of a quick change of the robust and durable Lorch feed rolls. Screws and tools are not required at all.

Maximum control thanks to the wire space window.

How much wire is left on the reel? The MF-09 will tell you at a glance, without interrupting your workday.

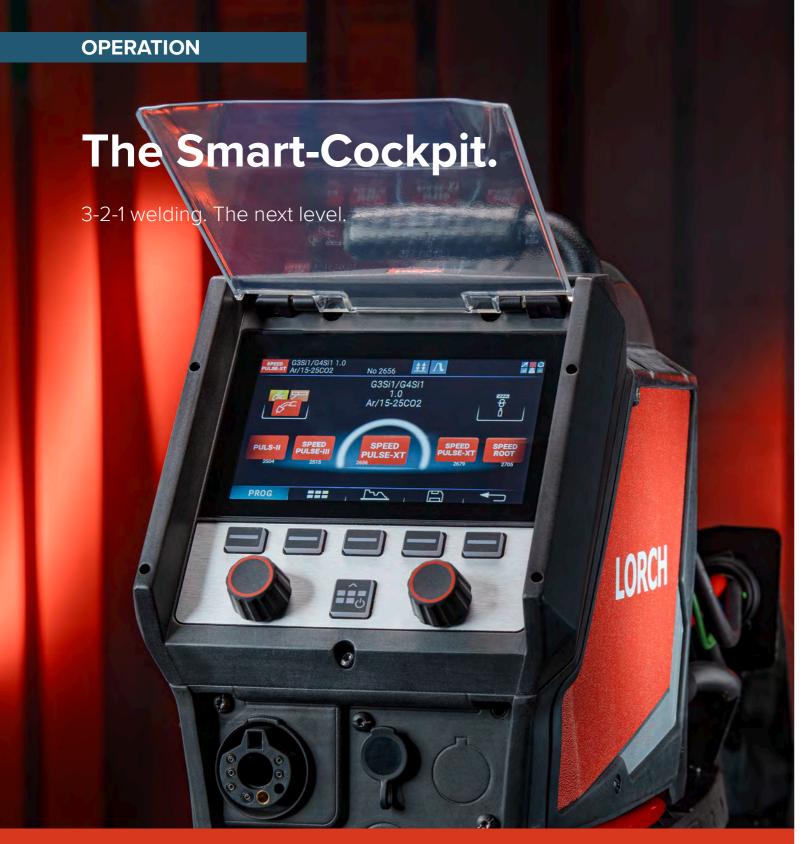

Intuitive. Fast. Precise. Get started with the Smart-Cockpit.

Robust 7-inch display.

High-quality TFT display for welding unit and feeder case. Large, in brilliant colour, and easy to read from any distance and any viewing angle. The display can even be operated with welding gloves. This increases both comfort and safety for the welder.

Optimal display protection.

A robust film protects the display from flying sparks, welding spatter, and dirt. It is also easy to replace, and the matt surface prevents annoying reflections.



Clear display cleverly presented.

The Smart-Cockpit always provides a clear overview of the current settings and additional information.



Incorrect settings are prevented.

The software will only display suitable wire/gas/material combinations and settings that are relevant for the process and task at hand.



Different complexities to suit the user.

From easy to comprehensive, all modes are clearly structured. The JobMode remains perfectly for fast saving of personalized-prefered welding values.



Configurable QuickAccess menu.

The QuickAccess menu, accessible via a central button, provides quick and easy access to important settings at any time.



Simple and self-explanatory menu navigation.

Whether by touch or completely via the rotary-push controllers – intuitive operation ist guranteed.



All important parameters always in view.

The graphic display visualises the secondary parameters of the welding process during welding. The hold function shows whether the parameters have been complied with after welding.

Built for one purpose: A long life.

User-friendly on the outside ...

Safety for the user:

- No sharp edges
- Sufficient ground clearance for any kind of obstacle
- Lockable wheels prevent rolling away
- Comfortable handles for transport in the production hall

Protection against damage:

- Robust side panels and self-supporting construction
- Transparent protective panel protects the touch display from flying sparks and welding spatter

Functional details:

- Large rolls at the rear for easy maneuvering and passing over obstacles
- Rubber mat on the housing cover of the compact power source as a stowage surface
- Sophisticated water drainage system



... service-friendly on the inside.

Low-maintenance design:

- Enclosed air duct
- Enclosed control
- Vibration-optimised mounting of the control boards
- All control boards are installed in an encapsulated and dust-free area

Cost-saving construction if service is required:

- Modular design for simple replacement of parts if service is required
- Reuse of the same assemblies



New water-cooling concept.

Developed for smooth operation and service.

The iQS has a modular water-cooling concept with a new water circulation cooling unit (WUK). This makes filling, draining, and reading the fill level even easier. If service is required, the WUK module can be removed and replaced in a few simple steps. The larger tank volume also permits use of feeder case systems with longer intermediate hose packages. This reduces your costs and increases your return on investment.

Wide mains voltage input range from 380 V – 480 V.

The versatility of iQS also extends beyond national borders:
The wide-range mains voltage input allows the system to be used internationally. It is also robust against mains voltage fluctuations.

Ready for the future!

The iQ LMS Performance torch.

Long Chi

Flexibility.

The innovative multiball joint ensures maximum mobility and allows the welder to work effortlessly even in difficult positions.



Centring of the wire.

The special design of the contact tips creates a wire-drawing effect. It has a recognisably positive effect on the welding result since the arc is much more stable and the wire delivery more precise.

Compact build.

Everything optimised to enable the slim torch handle. Every professional welder knows from their daily work how important perfect handling is for an optimal, fatigue-free welding process.



Perfect current transmission.

In contrast to conventionally designed torches, the current is not transmitted via the tip adapter or the thread here, but primarily via the rear conical area of the contact tip. This fits snugly and over a large area in the torch neck, ensuring perfect, reliable current transfer via the direct copper-to-copper connection.

Smart torch control.

For maximum control and comfort.





Technical data

| Welding range MIG-MAG | | iQS 3* | iQS 5* | iQS 8* |
|-----------------------------|-----------------|-----------------------------------|------------------|------------------|
| Weldable materials | | Steel, stainless steel, aluminium | | |
| Welding area | Α | 25 - 320 | 25 – 400 | 25 - 500 |
| Welding area | V | 15,2 - 30 | 15,2 - 34 | 15,2 - 39 |
| Open circuit voltage | V DC | 30 | 34 | 39 |
| Current at 60% ED (40 °C) | Α | 320 | 400 | 500 |
| Current at 100 % ED (40 °C) | Α | 320 | 320 | 400 |
| Unit | | iQS 3* | iQS 5* | iQS 8* |
| Mains voltage | V | 3~380 - 480 | 3~380 - 480 | 3~380 - 480 |
| Mains fuse | A slow- blow | 32 | 32 | 32 |
| Mains plug | | CEE 32 | CEE 32 | CEE 32 |
| Protection class (EN 60529) | | IP23S | IP23S | IP23S |
| Feed unit | Rolls | 4x4 | 4x4 | 4x4 |
| Dimensions (L × W × H) | mm | 1100 × 508 × 892 | 1100 × 508 × 892 | 1100 × 508 × 892 |

^{*} Preliminary technical data

EXCELLENT PERFORMANCE CAN BE SO SIMPLE! **START YOUR FUTURE NOW.**

Your contact:

913.1298.1 | EN | 09.2023 | Technical changes, price changes, and print errors